GRANDE FLAMME MILLENNIUM REF: 975-2M

- 975-2M Gas + Roof + Base Cabinet
- Standard stainless steel with black front enamel

The Grande Flamme Millenium 975-2M (formerly 950/2-S) combines fast cooking time with low energy consumption. This counter-top unit is available in gas or electric and cooks 8 chickens per hour.

With its visible flame, its powerful halogen light and its French design, the 975-2M offers a dramatic display, which makes it an incredible merchandizing tool.

The Grande Flamme features **a unique cooking system**. The adjustable spits allow you to roast to perfection from Cornish hen to whole lamb. The independent spit motors as well as the two independent burners allow you to cook on any selected spits without having to switch on the whole unit. The multiple spit motors also guarantee that your rotisserie is operational at all times! The inside panels are removable for easier cleaning.

The stainless steel burner patented by Rotisol has a lifetime warranty and offers unequalled efficiency.

When it comes to rotisseries,
Rotisol is your indispensable partner!

GRANDE FLAMME MILLENNIUM REF: 975-2M

STANDARD FEATURES

- 2 spits movers
- Bottom drip pan with drain plug
- Tempered “K” glass door
- Self Blocking doors
- 1 Powerful halogen lamp
- 3 “V” shape chicken spits
- Spits adjustable in depth (7 positions)
- Removable inside panels
- Inside stainless steel finish

ACCESSORIES

- Lamb Spit
- Ham/turkey spit
- Roast basket spit
- Complete Chicken spit
- Prongless “V” spit
- Rectangular basket spit
- Vertical spit system

OPTIONS

- Roof (R)
- Base cabinet with Retractable table (BC)
- Heated base cabinet (HBC)

FINISH

- SS: All stainless steel with brass or chrome trims
- Std: Standard Stainless Steel and Black enamel
- L: Deluxe, in all black enamel with brass or chrome trims
- Please contact us for other colors

CAPACITY

- 6/8 Chicken

POWER

- Gas (Natural)
- Gas (Propane)
- Electric

Rotisol-France, Inc. Tel (800) 651-5969 – 310-671-7254 Fax 310-671-8171 341 Oak Street, Los Angeles, CA 90302
www.rotisolusa.com info@rotisolusa.com

Information contained in this document is known to be current and accurate at the time of printing/creation. Rotisol-France, Inc. recommends referencing the product line website, rotisolusa.com, for the most updated product information and specifications. (Revised 5/2/2012

SPECIFICATIONS GF MILLENIUM 975-2M

PROJECT :	
ITEM NUMBER :	QTY:

DIMENSIONS (inches)

	WIDTH	HEIGHT	DEPTH
1–rotisserie	40 3/8	31 1/2	22 1/2
2–roof	38 5/8	6 3/8	25 5/8
3– base cabinet	38 5/8	29 7/8	23 7/8
4–Heated base cabinet	38 5/8	29 7/8	23 7/8
1+2+3	40 3/8	66 3/4	28 3/8
1+2+4	40 3/8	66 3/4	28 3/8
1+2	40 3/8	36 7/8	28 3/8
1+3	40 3/8	61 3/8	23 7/8
1+4	40 3/8	61 3/8	23 7/8

GAS MODEL – 975–2M GAS

– GAS CONNECTION
pipe ; 3/4",
28,000 Btu/h (natural gas)
25,000 Btu/h (propane)
Minimum pressure : 7" WC
regulator & shut off valve are furnished
1 burner per unit
– ELECTRICAL CONNECTION
290 W/ 208–220 V/ 1 phase/ 1.5 Amps
(HBC)1350 W/ 208–220 V/ 1 P/ 6.2 Amps
1 Electrical cable : 78" length
NEMA plug not included – direct plug requ.
– Above finish floor connection :
1 or 1+2= 9" AFF
1+4 or 1+3 = 19" AFF
1+4+2 or 1+3+2 = 30" AFF

ELECTRIC MODEL – 975–2M ELEC

– ELECTRICAL CONNECTION
6 340 Watts / 208–220 Volts
3 phases / 23 Amps
1 Electrical cable : 78" length
Direct plug required
NEMA plug not included
(HBC)7 KW/ 208–220 V/ 3 P/ 19 Amps
– Above finish floor connection :
1 or 1+2= 9" AFF
1+4 or 1+3 = 19" AFF
1+4+2 or 1+3+2 = 30" AFF

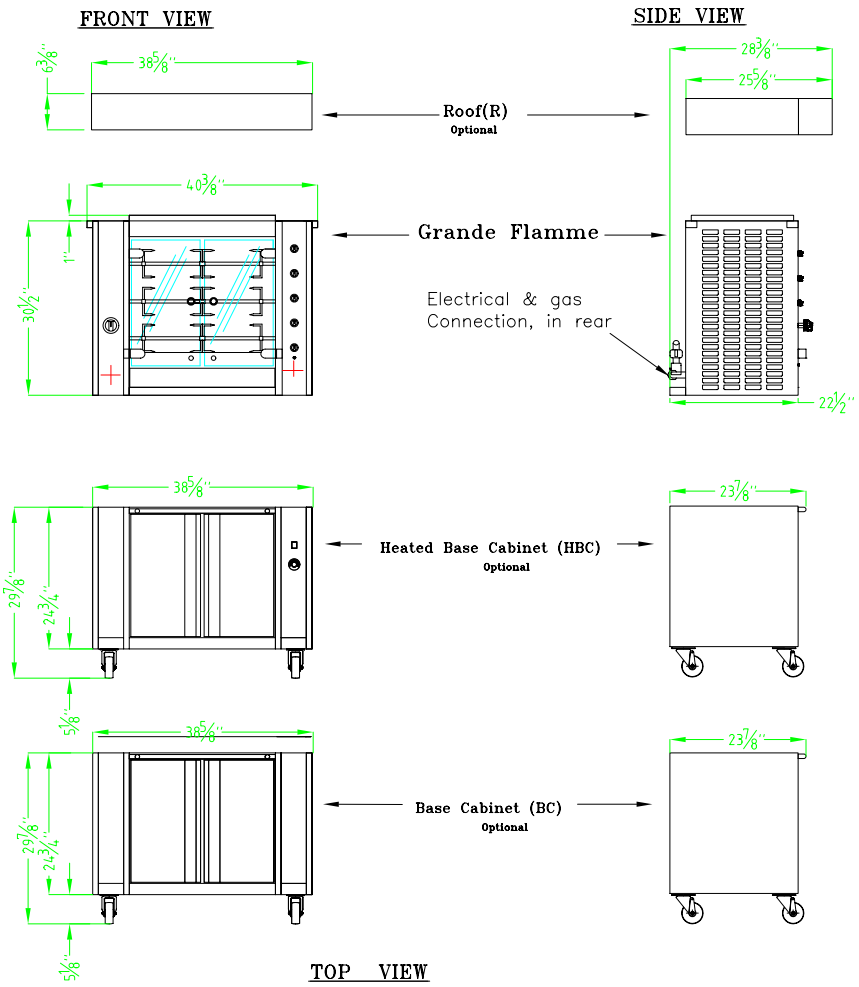

WEIGHT	NOTES	INSTALLATION REQUIREMENTS:	CLEARANCE :	PRODUCT CAPACITY:
– Roof: 20 lbs. – Rotisserie: 170 lbs. – Base Cabinet: 90 lbs. – Heated base cabinet: 110 lbs. – Packing: 50 lbs.	– No. of motors: 3 – No. of spits: 3 – No. of glass doors: 2 – No. of halogen lamps: 1	– Oven must be installed level. – Exhaust ventilation is required. Install on a non–combustible surface only. – The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.	– 6" (152mm) left, right, and rear A	– On V ANGLED SPITS (STANDARD): Up to 6 3–1/2 lb chickens Up to 9 2–1/2 to 3 lb chickens – For other spits please see the accessories specifications sheets

WARRANTY CONDITIONS :

Rotisol warrants its equipment to be free from defects in material and workmanship. The warranty covers parts for one year and labor for 6 months. Repairs must be performed by an authorized service company and it is the responsibility of the customer to return the defective parts to Rotisol France, Ic. within 15 days (otherwise, the warranty will not be honored). The shipping charges for replacement parts, other than ground, will be at the customer's expense. This warranty does not cover glass door breakage and quartz or halogen lamp breakage, neither does it cover mechanical parts. This warranty does not apply to damages by accident, incorrect line voltage, fire, water, or other acts of god.

06/10